


VIDEO COLOR SUPERIMPOSER

■ GENERAL DESCRIPTION

NJM2247 A/B is the multi-functional color superimposer IC for video base band (Y, R-Y, B-Y). Various type of Y, R-Y, B-Y output signals can be made by the digital controlled signals. The signal control at the base band, made it possible on operation with less external parts, as well as for non adjustment on operation.

■ PACKAGE OUTLINE



NJM2247 AM/BM


■ FEATURES

- 5V Single Power Supply
- 8 Types Color Superimposer
- Burst Flag Insert Function
- Y Inversion, C Inversion Function
- NTSC/PAL Matching
- Non Operational Adjustment
- Less External Parts
- Package Outline DMP20
- Bipolar Technology

■ RECOMMENDED INPUT CONDITIONS

- Y Signal 0.7 V_{P-P}
- R-Y Signal 1.0 V_{P-P}
- B-Y Signal 0.7 V_{P-P}
- Control Voltage
- Low Level 0~0.25 V
- High Level 4.75~5 V

■ PIN CONFIGURATION



NJM2247 AM/BM


PIN FUNCTION

- | | |
|-----------------------|---------------------------------|
| 1. Y _{out} | 11. GND |
| 2. V ⁺ | 12. HBF Pulse |
| 3. R | 13. BF |
| 4. G | 14. NTSC/PAL Switching |
| 5. B | 15. Clamp Pulse |
| 6. B-Y _{in} | 16. Character Pulse |
| 7. B-Y _{out} | 17. Y _{in} |
| 8. R-Y _{in} | 18. Inversion Set up Correction |
| 9. R-Y _{out} | 19. Y Inversion |
| 10. C Inversion | 20. BLK Pulse |





■ BLOCK DIAGRAM

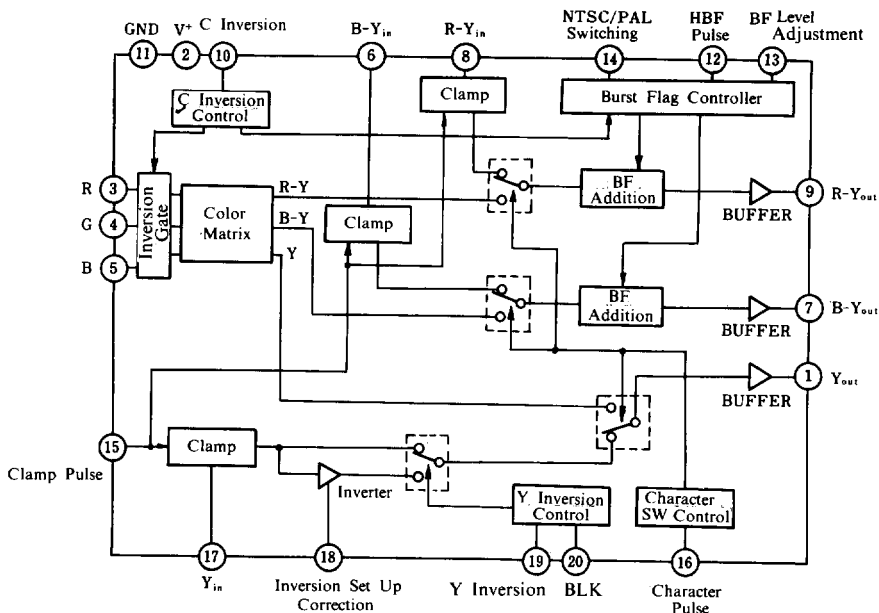


■ CONTROL PIN CHARACTERISTICS

(V⁺=5V)

| PIN NO. | PIN FUNCTIONS | THRESHOLD LEVEL(V) | | SINK/SOURCE CURRENT(μA) | |
|---------|------------------|--------------------|------|-------------------------|-----|
| | | LOW | HIGH | 0V | 5V |
| 3 | R | | | | |
| 4 | G | | | | |
| 5 | B | 0.7 | 0.8 | -500 | 500 |
| 3 | | | | | |
| 4 | (at C Inversion) | 2.5 | 2.6 | -100 | 100 |
| 5 | | | | | |
| 10 | C Inversion | 3.5 | 4.5 | -200 | 400 |
| 12 | HBF Pulse | 0.5 | 2.0 | -2 | 1 |
| 14 | NTSC/PAL | 0.7 | 0.8 | 0 | 150 |
| 15 | Clamp Pulse | 2.5 | 2.8 | -2 | 0 |
| 16 | Character Pulse | 0.5 | 0.9 | -0.5 | 0 |
| 19 | Y Inversion | 0.4 | 0.8 | -0.5 | 0 |
| 20 | BLK Pulse | 0.4 | 0.8 | -0.5 | 0 |



■ TEST CIRCUIT

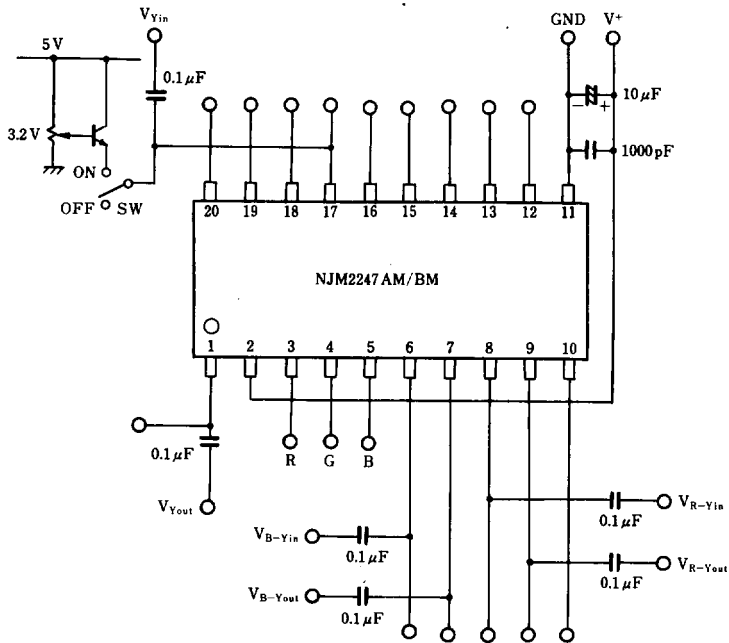



NJM2247A/B

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|------------------|----------|------|
| Supply Voltage | V' | 8 | V |
| Power Dissipation | P _D | 300 | mW |
| Operating Temperature Range | T _{opr} | -20~+75 | °C |
| Storage Temperature Range | T _{stg} | -40~+125 | °C |

■ ELECTRICAL CHARACTERISTICS

(V'=5V, Ta= 25°C)

| PARAMETERS | SYMBOLS | CONTROL PINS | | | | | | | | | | | | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT | | | | | | |
|---------------------------|------------------|--------------|---|---|---|---|---|---|---|---|---|---|---|-----------------|------|------|------|------|--|--|------|------|------|-----|
| | | ③ | ④ | ⑤ | ⑩ | ⑫ | ⑬ | ⑭ | ⑮ | ⑯ | ⑰ | ⑱ | ⑲ | | | | | | | | | | | |
| Operating Current | I _{CC} | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | NJM2247A NJM2247B | | 12 | 16.5 | 22 | mA |
| Terminal Sink Current 1 | I ₁₇ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | V ₁₇ =2.5V | | 12 | 18.5 | 26 | mA |
| Terminal Sink Current 2 | I ₆ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | V ₆ =3.0V | | 0 | - | 10 | μA |
| Terminal Sink Current 3 | I ₈ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | V ₈ =3.0V | | 0 | - | 6 | μA |
| Terminal Voltage 1 | V ₁ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | 1.68 | - | 1.92 | V |
| Terminal Voltage 2 | V ₇ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | 2.18 | - | 2.42 | V |
| Terminal Voltage 3 | V ₉ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | 2.18 | - | 2.42 | V |
| Terminal Voltage 4 | V ₁₃ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | 0.23 | - | 0.37 | V |
| Terminal Voltage 5 | V ₁₈ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | | 1.68 | - | 1.92 | V |
| Y Non Inversion | | | | | | | | | | | | | | | | | | | | | | | | |
| Y Inversion | | | | | | | | | | | | | | | | | | | | | | | | |
| Voltage Gain | G _{YP} | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | V _(in) =1V _{P-P} , 1MHz, SW=ON | | -0.5 | 0 | 0.5 | dB |
| Frequency Characteristics | G _{FYP} | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | G _{YP} (6MHz)-G _{YP} (1MHz), SW=0, SW=ON | | -1 | 0 | 1 | dB |
| Differential Gain | DG _P | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | V _(in) =1V _{P-P} , Staircase, SW=ON | | -3 | 0 | 3 | % |
| Differential Phase | DP _P | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | V _(in) =1V _{P-P} , Staircase, SW=ON | | -3 | 0 | 3 | deg |
| Voltage Gain | G _{YN} | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | V _(in) =0.6V _{P-P} , 1MHz, SW=ON | | -2.3 | -1.3 | 0.3 | dB |
| Frequency Characteristics | G _{FYN} | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | G _{YN} (6MHz)-G _{YN} (1MHz), SW=ON | | -2 | -0.1 | 1 | dB |
| Differential Gain | DG _N | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | V _(in) =0.5V _{P-P} , Staircase, SW=ON | | -8 | - | 8 | % |
| Differential Phase | DP _P | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | V _(in) =0.5V _{P-P} , Staircase, SW=ON | | -3 | 0 | 3 | deg |
| Inversion Black Level | BL _N | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ① Voltage; a, BL _N =a-b | | 0.59 | 0.68 | 0.77 | V |
| Inversion BLK | BLK | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ① Voltage; c, BLK=c-b | | -0.1 | 0 | 0.1 | V |
| R-Y | | | | | | | | | | | | | | | | | | | | | | | | |
| Voltage Gain | G _{R-Y} | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | V _(R-Yin) =1V _{P-P} , 1MHz | | -0.5 | 0 | 0.5 | dB |
| Burst Level Non Inversion | BF _{RP} | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ⑨ Voltage; d, BF _{RP} =e-d | | 135 | 150 | 165 | mV |
| Burst Level Inversion | BF _{RN} | 0 | 0 | 0 | 5 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ⑨ Voltage; e, BF _{RP} =e-d | | -165 | -150 | -135 | mV |
| B-Y | | | | | | | | | | | | | | | | | | | | | | | | |
| Voltage Gain | G _{B-Y} | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | V _(B-Yin) =1V _{P-P} , 1MHz | | -0.5 | 0 | 0.5 | dB |
| Burst Level Non Inversion | BF _{BP} | 0 | 0 | 0 | 0 | 5 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ⑦ Voltage; g, BF _{BP} =g-h | | 135 | 150 | 165 | mV |
| Burst Level Inversion | BF _{BN} | 0 | 0 | 0 | 5 | 5 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ⑦ Voltage; h, BF _{BP} =g-h | | -165 | -150 | -135 | mV |
| Burst Level Inversion | BF _{BN} | 0 | 0 | 0 | 5 | 5 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ⑦ Voltage; i, BF _{BN} =g-i | | -165 | -150 | -135 | mV |

5



■ NJM2247A ELECTRICAL CHARACTERISTICS (CONTINUED)

(V⁺=5V, T_a=25°C)

| PARAMETERS | SYMBOLS | CONTROL PINS | | | | | | | | TEST CONDITIONS | MIN. | TYP. | MAX. | UNITS | | |
|--------------------------|---------|--------------|---|---|---|---|---|---|---|-----------------|-------------------------------------|-------------------------------------|------|-------|-----|----|
| | | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ | | | | | | | |
| Character Output Level 1 | | | | | | | | | | | | | | | | |
| C Non Inversion | | | | | | | | | | | | | | | | |
| White | Y | MPWY | 5 | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPWY=A-V ₁ | 482 | 530 | 583 | mV |
| | R-Y | MPWR | 5 | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPWR=B-V ₉ | -14 | 0 | 14 | mV |
| | B-Y | MPWB | 5 | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPWB=C-V ₇ | -12 | 0 | 12 | mV |
| Yellow | Y | MPYY | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPYY=A-V ₁ | 427 | 470 | 517 | mV | |
| | R-Y | MPYR | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPYR=B-V ₉ | 22 | 42 | 62 | mV | |
| | B-Y | MPYB | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPYB=C-V ₇ | -206 | -186 | -166 | mV | |
| Cyan | Y | MPCY | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPCY=A-V ₁ | 335 | 370 | 410 | mV | |
| | R-Y | MPCR | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPCR=B-V ₉ | -289 | -266 | -243 | mV | |
| | B-Y | MPCB | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPCB=C-V ₇ | 40 | 63 | 87 | mV | |
| Green | Y | MPGY | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPGY=A-V ₁ | 285 | 313 | 334 | mV | |
| | R-Y | MPCR | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPCR=B-V ₉ | -243 | -224 | -205 | mV | |
| | B-Y | MPGB | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPGB=C-V ₇ | -145 | -123 | -105 | mV | |
| Magenta | Y | MPMY | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPMY=A-V ₁ | 198 | 218 | 240 | mV | |
| | R-Y | MPMR | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPMR=B-V ₉ | 205 | 224 | 243 | mV | |
| | B-Y | MPMB | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPMB=C-V ₇ | 105 | 123 | 145 | mV | |
| Red | Y | MPRY | 5 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPRY=A-V ₁ | 145 | 160 | 176 | mV | |
| | R-Y | MPRR | 5 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPRR=B-V ₉ | 243 | 266 | 289 | mV | |
| | B-Y | MPRB | 5 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPRB=C-V ₇ | -87 | -63 | -40 | mV | |
| Blue | Y | MPBY | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPBY=A-V ₁ | 40 | 58 | 76 | mV | |
| | R-Y | MPBR | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPBR=B-V ₉ | -62 | -42 | -22 | mV | |
| | B-Y | MPBB | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPBB=C-V ₇ | 166 | 186 | 206 | mV | |
| Black | Y | MPPY | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPPY=A-V ₁ | -20 | 0 | 20 | mV | |
| | R-Y | MPPR | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPPR=B-V ₉ | -14 | 0 | 14 | mV | |
| | B-Y | MPPB | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPPB=C-V ₇ | -12 | 0 | 12 | mV | |
| Character Output Level 2 | | | | | | | | | | | | | | | | |
| C Inversion | | | | | | | | | | | | | | | | |
| White | Y | MNWy | 5 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNWy=A-V ₁ | 482 | 530 | 583 | mV | |
| | R-Y | MNWR | 5 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNWR=B-V ₉ | -14 | 0 | 14 | mV | |
| | B-Y | MNWB | 5 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNWB=C-V ₇ | -12 | 0 | 12 | mV | |
| Yellow | Y | MNYy | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNYy=A-V ₁ | 427 | 470 | 517 | mV | |
| | R-Y | MNYR | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNYR=B-V ₉ | -62 | -42 | -22 | mV | |
| | B-Y | MNYB | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNYB=C-V ₇ | 166 | 186 | 206 | mV | |
| Cyan | Y | MNCy | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNCy=A-V ₁ | 335 | 370 | 410 | mV | |
| | R-Y | MNCR | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNCR=B-V ₉ | 243 | 266 | 289 | mV | |
| | B-Y | MNCB | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNCB=C-V ₇ | -87 | -63 | -40 | mV | |
| Green | Y | MNGy | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNGy=A-V ₁ | 285 | 313 | 334 | mV | |
| | R-Y | MNGR | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNGR=B-V ₉ | 205 | 224 | 243 | mV | |
| | B-Y | MNGB | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNGB=C-V ₇ | 105 | 123 | 145 | mV | |
| Magenta | Y | MNMy | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNMy=A-V ₁ | 198 | 218 | 240 | mV | |
| | R-Y | MNMR | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNMR=B-V ₉ | -243 | -224 | -205 | mV | |
| | B-Y | MNMB | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNMB=C-V ₇ | -145 | -123 | -105 | mV | |
| Red | Y | MNRy | 5 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNRy=A-V ₁ | 145 | 160 | 176 | mV | |
| | R-Y | MNRR | 5 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNRR=B-V ₉ | -289 | -266 | -243 | mV | |
| | B-Y | MNRB | 5 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNRB=C-V ₇ | 40 | 63 | 87 | mV | |
| Blue | Y | MNBy | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNBy=A-V ₁ | 40 | 58 | 76 | mV | |
| | R-Y | MNBR | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNBR=B-V ₉ | 22 | 42 | 62 | mV | |
| | B-Y | MNBB | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNBB=C-V ₇ | -206 | -186 | -166 | mV | |
| Black | Y | MNPY | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNPY=A-V ₁ | -20 | 0 | 20 | mV | |
| | R-Y | MNPR | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNPR=B-V ₉ | -14 | 0 | 14 | mV | |
| | B-Y | MNPB | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNPB=C-V ₇ | -12 | 0 | 12 | mV | |

5











■ NJM2247B ELECTRICAL CHARACTERISTICS (CONTINUED)

(V⁺=5V, T_a=25°)

| PARAMETERS | SYMBOLS | CONTROL PINS | | | | | | | | | | TEST CONDITIONS | MIN. | TYP. | MAX. | UNITS | |
|--------------------------|---------|--------------|---|---|---|---|---|---|---|---|---|-------------------------------------|------|------|------|-------|--|
| | | ③ | ④ | ⑤ | ⑩ | ⑭ | ⑮ | ⑯ | ⑰ | ⑱ | ⑳ | | | | | | |
| Character Output Level 1 | | | | | | | | | | | | | | | | | |
| C Non Inversion | | | | | | | | | | | | | | | | | |
| White | Y | MPWY | 5 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | 0 | ① Voltage; A, MPWY=A-V ₁ | 630 | 700 | 770 | mV | |
| | R-Y | MPWR | 5 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | 0 | ⑨ Voltage; B, MPWR=B-V ₉ | -14 | 0 | 14 | mV | |
| | B-Y | MPWB | 5 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | 0 | ⑦ Voltage; C, MPWB=C-V ₇ | -12 | 0 | 12 | mV | |
| Yellow | Y | MPYY | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | 0 | ① Voltage; A, MPYY=A-V ₁ | 472 | 525 | 578 | mV | |
| | R-Y | MPYR | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | 0 | ⑨ Voltage; B, MPYR=B-V ₉ | 13 | 33 | 53 | mV | |
| | B-Y | MPYB | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | 0 | ⑦ Voltage; C, MPYB=C-V ₇ | -165 | -146 | -127 | mV | |
| Cyan | Y | MPCY | 0 | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPCY=A-V ₁ | 409 | 455 | 501 | mV | |
| | R-Y | MPCR | 0 | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPCR=B-V ₉ | -232 | -209 | -186 | mV | |
| | B-Y | MPCB | 0 | 5 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPCB=C-V ₇ | 28 | 50 | 72 | mV | |
| Green | Y | MPCY | 0 | 5 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPCY=A-V ₁ | 252 | 280 | 308 | mV | |
| | R-Y | MPGR | 0 | 5 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPGR=B-V ₉ | -197 | -176 | -155 | mV | |
| | B-Y | MPCB | 0 | 5 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPCB=C-V ₇ | -117 | -97 | -77 | mV | |
| Magenta | Y | MPMY | 5 | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPMY=A-V ₁ | 378 | 420 | 462 | mV | |
| | R-Y | MPMR | 5 | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPMR=B-V ₉ | 155 | 176 | 197 | mV | |
| | B-Y | MPMB | 5 | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPMB=C-V ₇ | 77 | 97 | 117 | mV | |
| Red | Y | MPRY | 5 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPRY=A-V ₁ | 220 | 245 | 270 | mV | |
| | R-Y | MPRR | 5 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPRR=B-V ₉ | 186 | 209 | 232 | mV | |
| | B-Y | MPRB | 5 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPRB=C-V ₇ | -72 | -50 | -28 | mV | |
| Blue | Y | MPBY | 0 | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPBY=A-V ₁ | 156 | 175 | 194 | mV | |
| | R-Y | MPBR | 0 | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPBR=B-V ₉ | -53 | -33 | -13 | mV | |
| | B-Y | MPBB | 0 | 0 | 5 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPBB=C-V ₇ | 127 | 146 | 165 | mV | |
| Black | Y | MPPY | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MPPY=A-V ₁ | -20 | 0 | 20 | mV | |
| | R-Y | MPPR | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MPPR=B-V ₉ | -14 | 0 | 14 | mV | |
| | B-Y | MPPB | 0 | 0 | 0 | 0 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MPPB=C-V ₇ | -12 | 0 | 12 | mV | |
| Character Output Level 2 | | | | | | | | | | | | | | | | | |
| C Inversion | | | | | | | | | | | | | | | | | |
| White | Y | MNWy | 5 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | 0 | ① Voltage; A, MNWy=A-V ₁ | 630 | 700 | 770 | mV | |
| | R-Y | MNWR | 5 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | 0 | ⑨ Voltage; B, MNWR=B-V ₉ | -14 | 0 | 14 | mV | |
| | B-Y | MNWB | 5 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | 0 | ⑦ Voltage; C, MNWB=C-V ₇ | -12 | 0 | 12 | mV | |
| Yellow | Y | MNYy | 5 | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNYy=A-V ₁ | 472 | 525 | 578 | mV | |
| | R-Y | MNYR | 5 | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNYR=B-V ₉ | -53 | -33 | -13 | mV | |
| | B-Y | MNYB | 5 | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNYB=C-V ₇ | 127 | 146 | 165 | mV | |
| Cyan | Y | MNCy | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | 0 | ① Voltage; A, MNCy=A-V ₁ | 409 | 455 | 501 | mV | |
| | R-Y | MNCR | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | 0 | ⑨ Voltage; B, MNCR=B-V ₉ | 186 | 209 | 232 | mV | |
| | B-Y | MNCB | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | 0 | ⑦ Voltage; C, MNCB=C-V ₇ | -72 | -50 | -28 | mV | |
| Green | Y | MNGy | 0 | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNGy=A-V ₁ | 252 | 280 | 308 | mV | |
| | R-Y | MNGR | 0 | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNGR=B-V ₉ | 155 | 176 | 197 | mV | |
| | B-Y | MNCB | 0 | 5 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNCB=C-V ₇ | 77 | 97 | 117 | mV | |
| Magenta | Y | MNMy | 5 | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNMy=A-V ₁ | 378 | 420 | 462 | mV | |
| | R-Y | MNMR | 5 | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNMR=B-V ₉ | -197 | -176 | -155 | mV | |
| | B-Y | MNMB | 5 | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNMB=C-V ₇ | -117 | -97 | -77 | mV | |
| Red | Y | MNRy | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNRy=A-V ₁ | 220 | 245 | 270 | mV | |
| | R-Y | MNRR | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNRR=B-V ₉ | -232 | -209 | -186 | mV | |
| | B-Y | MNRB | 5 | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNRB=C-V ₇ | 28 | 50 | 72 | mV | |
| Blue | Y | MNBy | 0 | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNBy=A-V ₁ | 156 | 175 | 194 | mV | |
| | R-Y | MNBR | 0 | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNBR=B-V ₉ | 13 | 33 | 53 | mV | |
| | B-Y | MNBB | 0 | 0 | 5 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNBB=C-V ₇ | -165 | -146 | -127 | mV | |
| Black | Y | MNPY | 0 | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ① Voltage; A, MNPY=A-V ₁ | -20 | 0 | 20 | mV | |
| | R-Y | MNPR | 0 | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑨ Voltage; B, MNPR=B-V ₉ | -14 | 0 | 14 | mV | |
| | B-Y | MNPB | 0 | 0 | 0 | 5 | 0 | 0 | 5 | 5 | 0 | ⑦ Voltage; C, MNPB=C-V ₇ | -12 | 0 | 12 | mV | |



■ EQUIVALENT CIRCUIT

| PIN NO. | PIN FUNCTION | INSIDE EQUIVALENT CIRCUIT | PIN NO. | PIN FUNCTION | INSIDE EQUIVALENT CIRCUIT |
|---------|------------------|---|---------|--------------------|--|
| 1 | Y _{out} |  | 6 | B-Y _{in} |  |
| 2 | V ⁺ | _____ | | | |
| 3 | R |  | 7 | B-Y _{out} |  |
| 4 | G |  | 8 | R-Y _{in} |  |
| 5 | B |  | 9 | R-Y _{out} |  |

5



■ EQUIVALENT CIRCUIT

| PIN NO. | PIN FUNCTION | INSIDE EQUIVALENT CIRCUIT | PIN NO. | PIN FUNCTION | INSIDE EQUIVALENT CIRCUIT |
|---------|--------------|---------------------------|---------|-----------------------------|---------------------------|
| 10 | C Inversion | | 15 | Clamp Pulse | |
| | | | 16 | Character Pulse | |
| 11 | GND | | 17 | Y _{in} | |
| 12 | HBF Pulse | | | | |
| 13 | BF Level | | 18 | Inversion Set up Correction | |
| 14 | NTSC/PAL | | | | |
| | | | 19 | Y Inversion BLK | |
| | | | 20 | | |



■ INFORMATIONS

Following four points are the outstanding function of the NJM2247A/B. These functions are to go through three input (Y, R-Y, B-Y) signals control by ten control pins.

1. Color Superimpose
DC level of each equivalent colors shall be supplied to Y, R-Y and B-Y inputs.
2. Burst Flag Insertion
150 mV burst flag shall be added to R-Y, B-Y input signals.
Burst flag is selected by the NTSC/PAL switch.
3. C Inversion

The color phase of the picture shall be inverted for one hundred and eighty degrees. The color phase of the imposed character shall not be altered. This function shall be proceeded when inverting the burst flag, and at the same time, the imposed character level shall be inverted too.

4. Y Inversion

It is the brightness level inversion. The imposed character color shall not be changed. This function shall be proceeded the switching Y signal output to the inverter side.

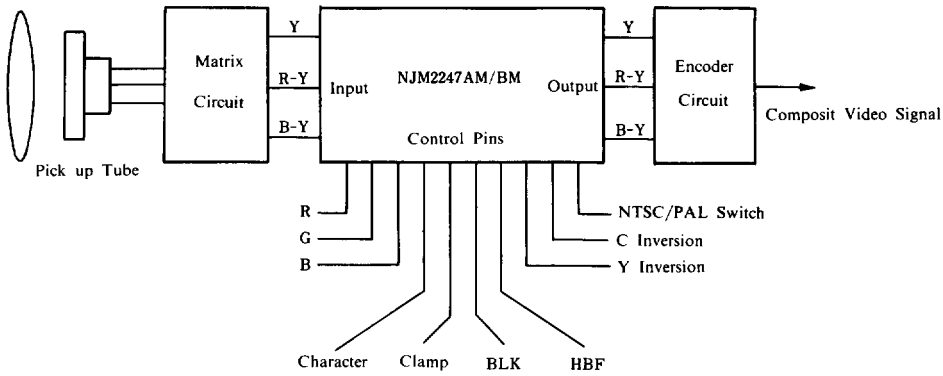


Fig. 1 Video Camera Application

■ APPLICATION NOTES

I/O Explanation

| | | | |
|------------------|----------------|----------------------|---|
| • Supply Voltage | V ⁺ | 5V | ② |
| | GND | | ⑩ |
| • Input Signals | Y | 0.7 V _{p-p} | ⑬ |
| | R-Y | 1.0 V _{p-p} | ⑧ |
| | B-Y | 0.7 V _{p-p} | ⑥ |
| • Output Signals | Y | 0.7 V _{p-p} | ① |
| | R-Y | 1.0 V _{p-p} | ⑨ |
| | B-Y | 0.7 V _{p-p} | ⑦ |



■ APPLICATION NOTES

I/O Explanation

- Control Pin Low=0V, HIGH=5V

R^③
G^④
B^⑤ } Superimposed color adjustment

Clamp Pulse ^⑬
Character Pulse ^⑭
HBF Pulse ^⑮
BLK Pulse ^⑯ } Y, R-Y, B-Y signal process pulse input

C Inversion ^⑩
Y Inversion ^⑪ } Color difference, brightness inverting pin

NTS/PAL Switch

- Adjusting Pin (Normally open → non adjustment)
BF level ^⑬ Burst flag insert level adjusting pin.
Inversion set up correction ^⑱ Y inversion signal level adjusting pin.

1. Input Signal

Superimposed color level shall be determined by the following standard signal level.

Y 0.7V_{P-P}
R-Y 1.0V_{P-P}
B-Y 0.7V_{P-P}

The character output standard level on the specification shall be determined through calculation out of 75 % of superimposed color level.

(In order to avoid the clipping of the encoding signal, the character output level is determined to lower level)

- The character output level converting expression

The basic expression

$$\begin{aligned} E_R - E_Y &= 0.70E_R - 0.59E_G - 0.11E_B \\ E_B - E_Y &= -0.30E_R - 0.59E_G + 0.89E_B \\ E_Y &= 0.30E_R + 0.59E_G + 0.11E_B \end{aligned}$$

From standard level and practical input level, each color signal level imposed in R-Y, B-Y and Y signals are as in the following.

$$\begin{aligned} V_{R-Y} &= 0.75 \times 1 [V_{P-P}] \times E_{R-Y} / 1.4 \\ &= 0.375E_R - 0.316E_G - 0.059E_B \\ V_{B-Y} &= 0.75 \times 0.7 [V_{P-P}] \times E_{B-Y} / 1.78 \\ &= -0.088E_R - 0.174E_G + 0.263E_B \\ V_Y &= 0.158E_R + 0.310E_G + 0.058E_B \\ &\text{(} E_R, E_G, E_B \text{は, LOW 0, HIGH 1)} \end{aligned}$$

2. Clamp Pulse

During the interval of blanking, input the pulse through clamp pulse pin ^⑳ the blanking level (0 level) of input signal (Y, R-Y, B-Y) is to be fixed at the bias point within the IC.

Note) The pulse width of clamp pulse shall be set more than A version 6 μs and B version 3 μs. (see figure 2)

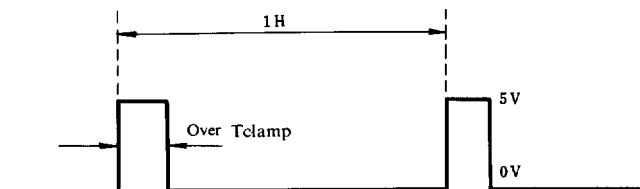


Fig. 2 Clamp Pulse Width



3. Character Color Adjustment

Superimposed color adjustment of the character can be determined in eight different colors, by choosing R, G, B input levels.

(LOW 0 V, HIGH 5 V)

| R | G | B | COLOR |
|---|---|---|---------|
| 5 | 5 | 5 | White |
| 5 | 5 | 0 | Yellow |
| 0 | 5 | 5 | Cyan |
| 0 | 5 | 0 | Green |
| 5 | 0 | 5 | Magenta |
| 5 | 0 | 0 | Red |
| 0 | 0 | 5 | blue |
| 0 | 0 | 0 | Black |

Character Color Selecting Code

4. Character Insertion

Pulse informations from outside character generator shall be given input at the character pulse pin ⑩. During the period of pulse process, the selected color level shall be inserted into each Y, R-Y, B-Y.

5. Burst Flag Insertion

Inputting burst period pulse at the HBF pin ⑫, the burst flag (150mV) can be inserted in the B-Y, R-Y signals. At the same time, by putting NTSC/PAL switch ⑭, the burst flag can be altered to NTSC or PAL system.

| | NTSC/PAL SWITCH ⑭ | |
|------------|-------------------|-----------------|
| | LOW 0 V (PAL) | HIGH 5 V (NTSC) |
| R-Y Signal | +150 mV | non insertion |
| B-Y Signal | -150 mV | -150 mV |

Burst Flag Inserting

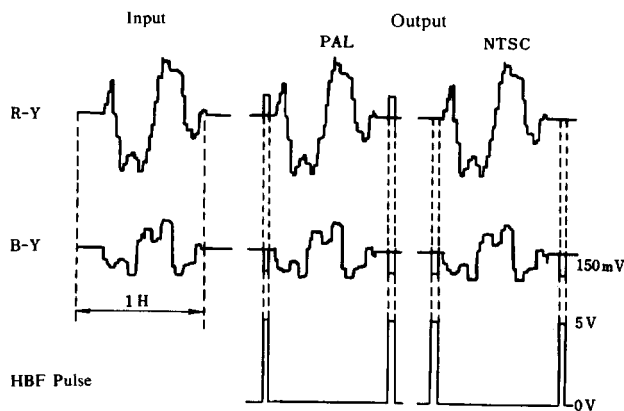


Fig.3 Burst Flag Inserting Example



NJM2247A/B

6. C Inversion

The color phase of the picture shall be inverted for one hundred and eighty degrees setting C inversion pin ⑩. It is applied that the reference signal (burst flag) shall be inverted into one hundred and eighty degrees at the time of de-coding.

Superimposed character color do not change at the picture inversion.

| | C INVERSION PIN ⑩ | |
|-------|-------------------|-----------|
| | LOW 0V | HIGH 5V |
| Burst | Non Inversion | Inversion |

C Inversion Form

7. Y Inversion

The brightness of the picture shall be inverted by setting Y inversion pin ⑨. It is that Y signal shall be inverted by the inverter, and then blanking period signal shall be adjusted to the black level with blanking pulse.

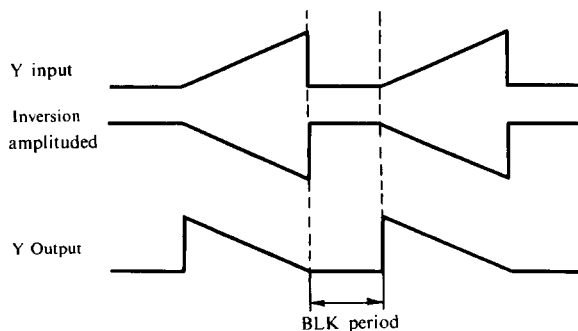


Figure 4. Y Inversion Output Example

| | Y INVERSION PIN ⑨ | |
|----------|-------------------|-----------|
| | LOW 0V | HIGH 5V |
| Y output | Non inversion | Inversion |

Y Inversion Form

8. Adjusting pin

(1) BF Level Pin ⑬

It is the burst flag minor adjusting pin. The burst level shall be adjusted at the open voltage, 0.3V level adjustment. Therefore, the most recommended on operation with the open condition, as it has been controlled at 135 to 165 mV (burst level) on specification.


(2) Inversion Set Up Correction Pin ⑱

It is the minor adjusting pin of Y inversion signal level. The inverting black level shall be adjusted at the open voltage, 1.8 V level adjustment. Therefore, the most recommended on operation with the open condition, as it has been controlled with 0.59 to 0.77 V (inverting black level) on specification.



9. Pulse Timing

The pulse input timing should be proceeded as in the following.

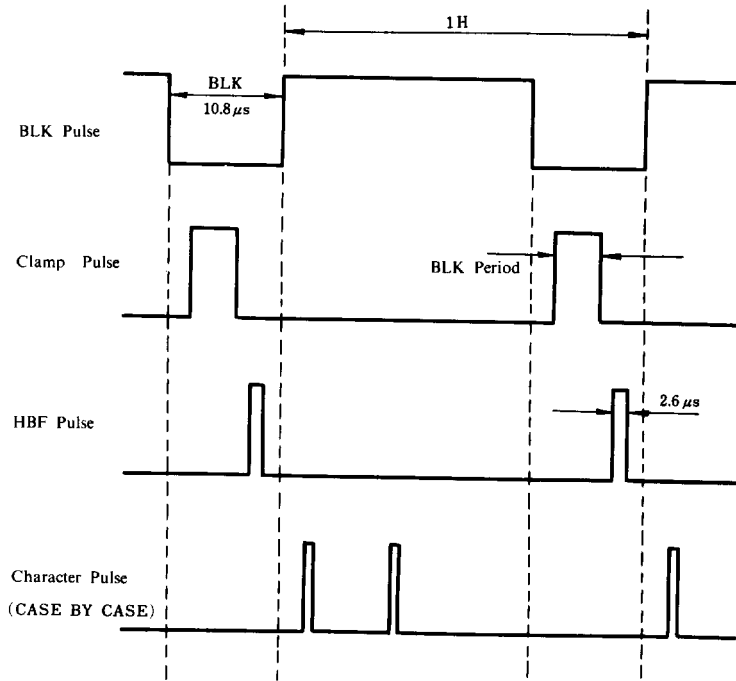

5

■ TYPICAL APPLICATION

