

2 CHANNEL BRIDGE DRIVER IC

■ GENERAL DESCRIPTION

The NJW4301 is a 2 channel bridge driver for CD, CD-ROM, MO and others. It operates at more than 4V, and then features high output voltage swing.


Its output circuit consists of MOS-FET. The MOS-FET type output realizes lower consumption than bipolar type output, so that radiation design becomes simple and total costs are reduced.

■ FEATURES


- Operating Voltage ($V^+ = 4V \sim 12V$)
- Low Saturation Output ($V_{sat} = \pm 0.5V_{MAX.}$ at $I_o = 300mA$)
- Supply Current (35mA MAX.)
- 2 channel BTL Output
- Mute Function
- Bi-MOS Technology
- Package Outline

DIP16, SDMP30

■ PACKAGE OUTLINE




NJW4301D



NJW4301M

■ BLOCK DIAGRAM

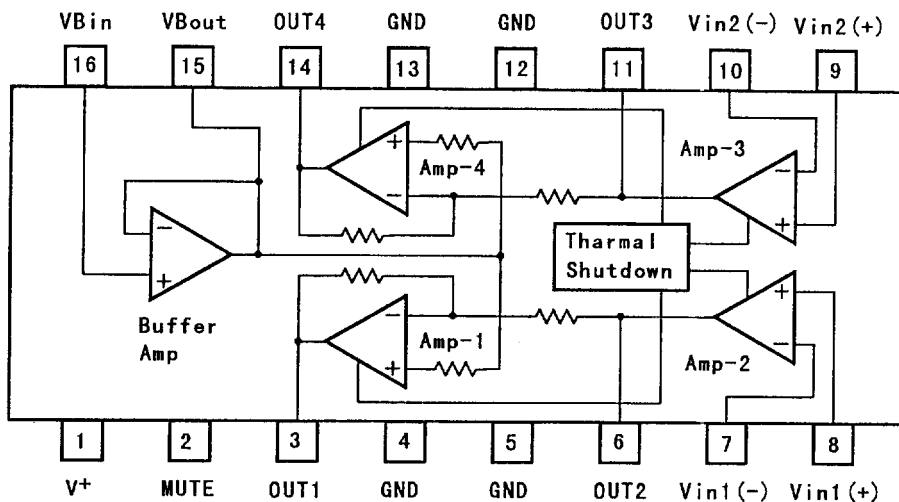

(Package DIP-16)


■ ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	15	V
Operating Current	I_o	1	A
Mute Terminal Current	I_M	1.0	mA
Power Dissipation	P_o	(DIP16) 1.9 (SDMP30) 1.8 (note 1)	W
Operating Temperature Range	T_{opr}	-40~+85	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40~+150	$^\circ\text{C}$


(note 1) At on PC board.

■ ELECTRICAL CHARACTERISTICS ($V^+ = 5\text{V}$, $T_a = 25^\circ\text{C}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
[ALL]						
Operating Supply Voltage Range	V^+		4	5	12	V
Mute OFF Current Dissipation	I_{cc1}	$V_M = 4.2\text{V}, V_{IN} = 2.5\text{V}$	-	20	35	mA
Mute ON Current Dissipation	I_{cc2}	$V_M = 0\text{V}, V_{IN} = 2.5\text{V}$	-	2	3.5	mA
[POWER AMPLIFIER]						
Output Offset Voltage	V_{OF}	OUT1-OUT2, GAIN=1 OUT4-OUT3, GAIN=1	-50	-	50	mV
Input Common Mode Voltage Range	V_{ICM}	AMP2 AMP3	0	-	V^+	V
Input Bias Current	I_B	AMP2 AMP3	-	-	300	nA
Maximum Output Voltage 1	V_{o1}	OUT1-OUT2, $I_L = 300\text{mA}$ OUT4-OUT3, $I_L = 300\text{mA}$	4.0	4.2	-	V
Maximum Output Voltage 2	V_{o2}	OUT1-OUT2, $I_L = 500\text{mA}$ OUT4-OUT3, $I_L = 500\text{mA}$	3.0	3.5	-	V
Open Loop Voltage Gain	A_v	AMP2, $R_L = 2\text{k}\Omega, V_{IN} = 2.5\text{V}$ AMP3, $R_L = 2\text{k}\Omega, V_{IN} = 2.5\text{V}$	35	50	-	dB
[BUFFER AMPLIFIER]						
Input Output Potential Difference	V_{BIO}		-30	0	30	mA
Input Voltage Range	V_{BICM}		1.5	2.5	3.5	V
Output Voltage Range	ΔV_{BO}	$V_{IN} = 2.5\text{V}, I_L = -5\text{mA}$ $V_{IN} = 2.5\text{V}, I_L = +5\text{mA}$	-	-	-50	mA
[MUTING]						
Mute OFF Voltage	V_{MH}		3.5	4.2	-	V
Mute ON Voltage	V_{ML}		-	0.8	1.0	V
Mute Sink Current	I_M	$V_M = 5\text{V}$	70	100	130	μA




■ PIN CONFIGURATION

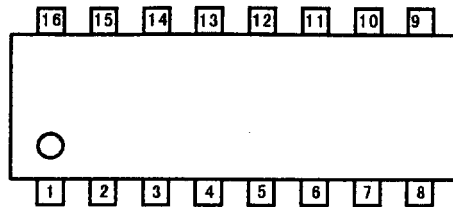

DIP-16

1 : V ⁺	9 : V _{in} 2 (+)
2 : MUTE	10 : V _{in} 2 (-)
3 : OUT1	11 : OUT3
4 : GND	12 : GND
5 : GND	13 : GND
6 : OUT2	14 : OUT4
7 : V _{in} 1 (-)	15 : V _B out
8 : V _{in} 1 (+)	16 : V _B in

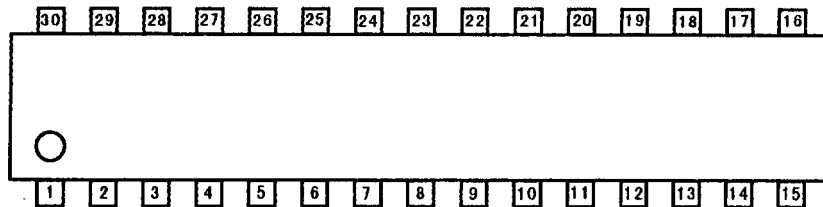

SDMP-30

1 : GND	16 : GND
2 : GND	17 : GND
3 : OUT4	18 : OUT2
4 : NC	19 : NC
5 : NC	20 : NC
6 : V _B out	21 : V _{in} 1 (-)
7 : V _B in	22 : V _{in} 1 (+)
8 : NC	23 : NC
9 : V ⁺	24 : V _{in} 2 (+)
10 : MUTE	25 : V _{in} 2 (-)
11 : NC	26 : NC
12 : NC	27 : NC
13 : OUT1	28 : OUT3
14 : GND	29 : GND
15 : GND	30 : GND

■ TERMINAL EXPLANATION

PIN NO.		PIN NAME	FUNCTION	INSIDE EQUIVALENT CIRCUIT
DIP -16	SDMP -30			
4 5 12 13	1 2 14 15 16 17 29 30	GND	Recommend expanding the island in order to heat radiation properties.	
14	3	OUT4	Output terminal of AMP.4. OUT4 signal is opposite phase against OUT3.	
-	4 5 8 11 12 19 20 23 26 27	NC	Non-connection terminal. Recommend connecting to GND.	



■ TERMINAL EXPLANATION

PIN NO.		PIN NAME	FUNCTION	INSIDE EQUIVALENT CIRCUIT
DIP -16	SDMP -30			
15	6	VBout	An buffer amplifier output.	
16	7	VBin	An buffer amplifier input.	
1	9	Vcc	Supply Voltage.	
2	10	MUTE	An mute input. Pulldown by 50kΩ (TYP) resistor.	



■ TERMINAL EXPLANATION


PIN NO.		PIN NAME	FUNCTION	INSIDE EQUIVALENT CIRCUIT
DIP -16	SDMP -30			
3	13	OUT1	Output terminal of AMP. 1. OUT1 signal is opposite phase against OUT2.	
6	18	OUT2	Output terminal of AMP. 2.	
7	21	Vin1(-)	Inverting input terminal of AMP. 2.	
8	22	Vin1(+)	Non-inverting input terminal of AMP. 2.	

■ TERMINAL EXPLANATION


PIN NO.		PIN NAME	FUNCTION	INSIDE EQUIVALENT CIRCUIT
DIP -16	SDMP -30			
9	24	Vin2(+)	Inverting input terminal of AMP. 3.	
10	25	Vin2(-)	Non-inverting input terminal of AMP. 3.	
11	28	OUT3	Output terminal of AMP. 3.	



■ APPLICATION CIRCUITS





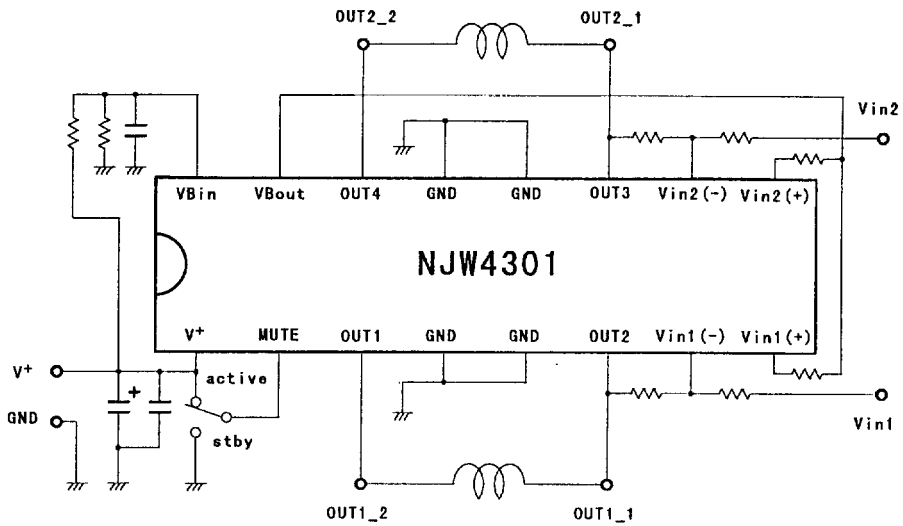


NJW4301(DIP-16) Application Circuit

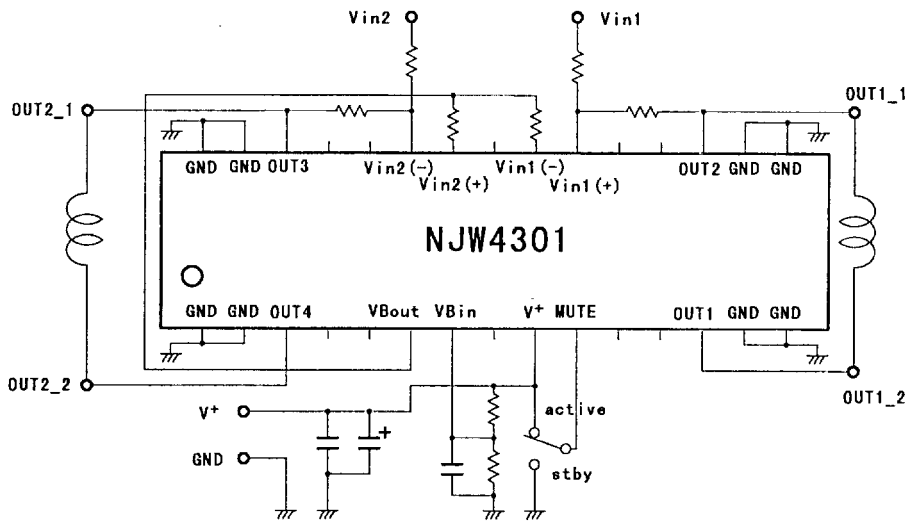

NJW4301(SDMP-30) Application Circuit


■ TYPICAL CHARACTERISTICS

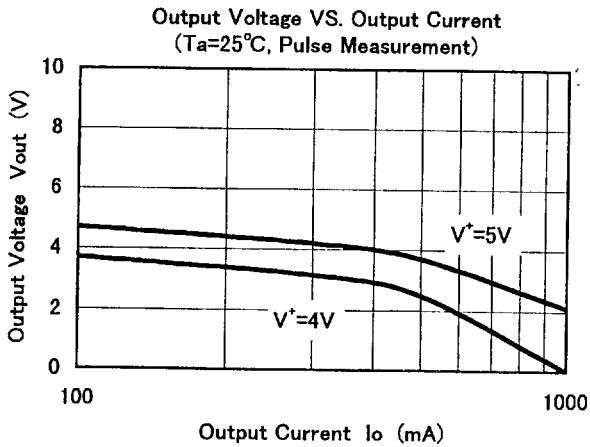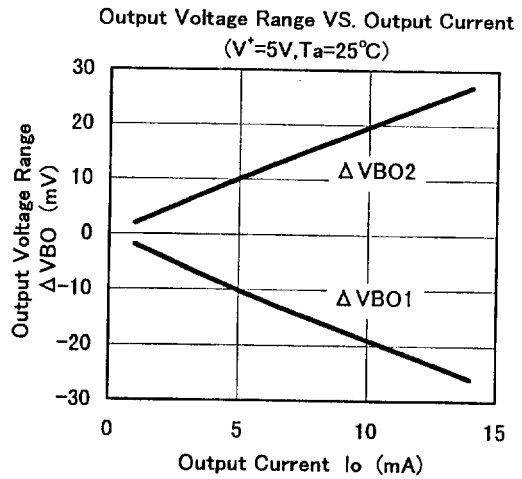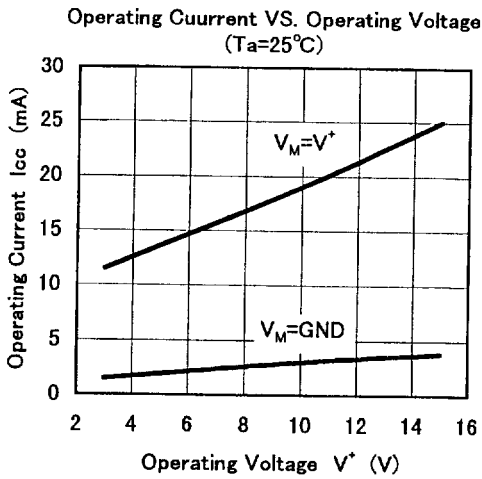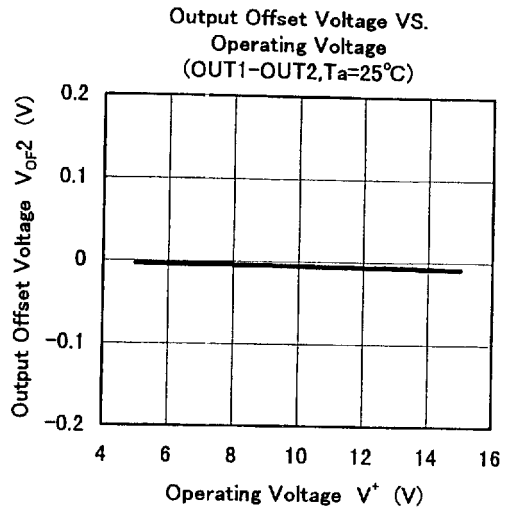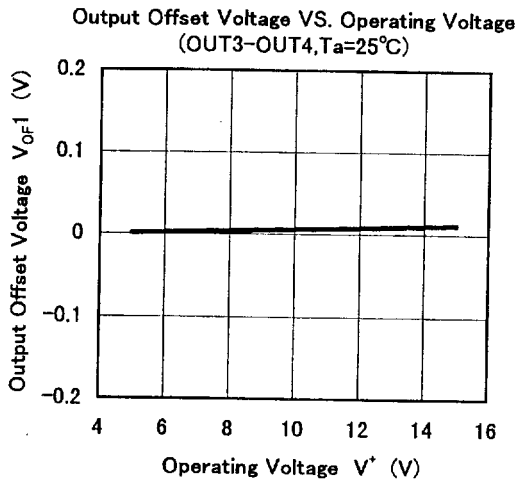




■ TYPICAL CHARACTERISTICS


Total Harmonic Distortion VS. Output Power
 ($V^*=5V, R_L=8\Omega, T_a=25^\circ C$)

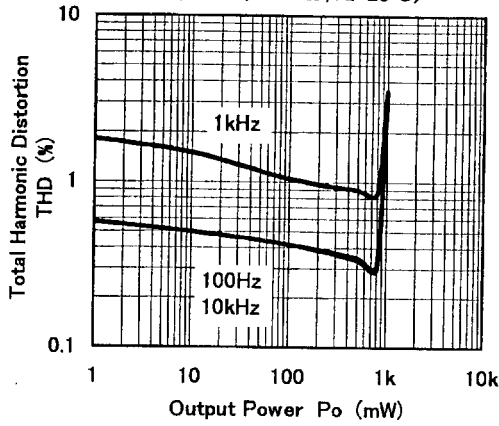

Total Harmonic Distortion VS. Output Power
 ($V^*=5V, R_L=4\Omega, T_a=25^\circ C$)

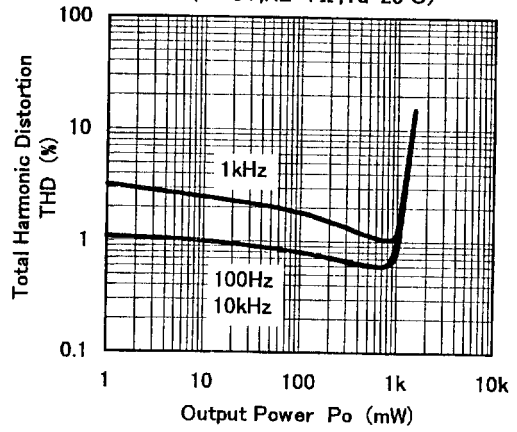

Total Harmonic Distortion VS. Frequency
 ($V^*=5V, R_L=8\Omega, T_a=25^\circ C$)

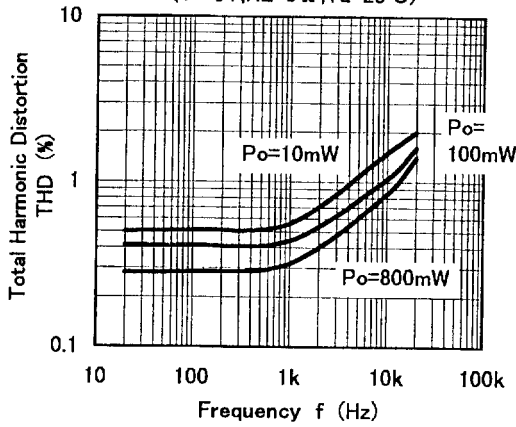

Total Harmonic Distortion VS. Frequency
 ($V^*=5V, R_L=4\Omega, T_a=25^\circ C$)

